

English

S75-VR screenless the third mock examination keyboard manual

Scope of application:

The Xinmeng S75-VR third mock examination keyboard is designed with 81 keys, featuring VR functionality and ARGB lighting. It supports three working modes: Bluetooth, 2.4G, and wired, allowing for connection and control with related devices.

Hardware requirements:

A phone or computer with Bluetooth and a USB port available for connecting devices.


Schematic diagram of three-mode connection:




Bluetooth connection mode



2.4G connection mode



Wired connection mode



XINMENG新盟

S75-VR

Mechanical Keyboard

生产厂家:东莞新盟达电子有限公司
生产厂址:广东省东莞市南博路沙涌沙二里38号1号楼
电话: 0769-81829716/01829736
传真: 0769-81829756
网址: http://www.szxinmeng.com.cn
执行标准:GB/T14051-2010
中国制造/MADE IN CHINA

Manufacturer:Dongguan Zhidaming Electronics Co.
Address:Building 1, No.38, Jinsha Road 2, Shajiao, Shipai Town, Dongguan City, Guangdong Province, China
Website:http://www.szxinmeng.com.cn
Execution standard:GB/T14051-2010
MADE IN CHINA



微信扫码关注 了解更多资讯
SCAN THE QR CODE TO FOLLOW US FOR MORE UPDATES

SZINMENG.COM.CN

PM4-S75EKL01

中文

S75-VR 无屏三模键盘说明书

产品适用范围:

新盟S75-VR三模键盘,设计81键带VR功能及ARGB-灯光,蓝牙+2.4G-有线三种工作模式与相关设备连接使用,产品都可运行于电脑Windows2000, WindowsXP, Vista, Win7, Win8, Win10, WIN11, OS2-2.0版本以上及带蓝牙版本手机系统。本机蓝牙设备名称《S75BT1-BT3》

硬件要求:

带蓝牙的手机或电脑并有连接设备可用的USB端口。

三模式连接示意图:




蓝牙连接模式



2.4G连接模式



有线连接模式

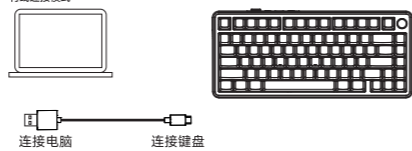

S75三模键盘安装步骤及使用:

- 1. S75三模键盘蓝牙模式连接对码安装步骤及使用: 当要使用键盘的蓝牙频道时, 要把键盘的模式切换开关打到BT图标位置, 再长按FN+Q, 键进行蓝牙广播, 这时键盘Q键灯灯会闪青色灯光, 如是长按FN+W蓝牙广播键时, 键盘W键灯灯会闪烁黄色灯光, 当长按FN+E蓝牙广播键时, 键盘E键灯灯会闪黄色灯光, 当蓝牙对码连好时相应键灯灯亮一会后会恢复原灯光模式。如果键盘与手机连接时, 要分别长按键盘FN+Q/FN+W/FN+E任一组合键进行蓝牙广播, 这时打开手机的《设置》点蓝牙, 再在蓝牙对话框选取设备名进行配对连接就可以了, 如在电脑WIN-7上使用, 应在电脑上点击《开始》选《控制面板》再点《添加设备》这时电脑会出现添加设备介面, 接着把键盘的模式切换键打到-蓝牙图标位置, 再长按键盘的FN+Q、W、E进行对码广播, 当电脑介面出现键盘图标时, 再选点一下《键盘图标》后要点击《添加设备》的《下一步》对话框按提示操作, 那电脑可以同键盘蓝牙连接好。在电脑WIN-10上安装步骤: 在电脑上点《开始》选《设备》选《蓝牙》再在列表选《键盘图标》点配对应介面对话框可完成, 不同的操作系统会有所不同, 所以在安装连接要注意。

- 2. S75三模键盘2.4G模式安装步骤及使用: 键盘还可配带接收器同电脑连接, 把键盘模式开关置在2.4G图标的状态下, 长按FN+R键, 这时键盘R键灯灯会闪蓝色灯光, 这时要把接收器快速插到电脑空闲的USB端口上, 这样电脑会自动确认对码并安装好相应适配软件, 电脑在完成安装并可以使用时, 键盘字符键灯灯过一会熄灭后又恢复原灯光模式, 这说明键盘电脑配对成功可以使用了。

- 3. S75三模键盘有线模式安装步骤及使用: 键盘还可配带接收器同电脑连接, 把键盘模式开关置在2.4G图标的状态下, 长按FN+R键, 把键盘的模式切换键打在中间有线图标位置时, 键盘是采用USB有线方式同电脑连接使用。(当键盘电量不足时《ESC》键灯灯会亮红色-说明键盘也在充电状态-直到充满电后键灯灯光会恢复原灯光模式。)

S75-三模键盘FN功能及灯光操作说明:

Table with 3 columns: FN+Q, FN+W, FN+R, FN+TAB, FN+DEL, FN+\*, FN+\*, FN+BackSpace. Functions include lighting effects, brightness, volume, and system shortcuts.

键盘支持灯光效果模式具有:

随波逐流(默认)、峰回路转、一触即发、一石二鸟、连弩扩散、川流不息、垂击叠峰、斜风细雨、来回穿梭、静态恒亮、单键点亮、单键熄灭、繁星点点、漫天飞舞、百花争艳、动态呼吸、光谱循环、彩泉涌动、多彩纵横、彩虹火车、七彩聚焦、霓虹光影、关闭背光-依次循环切换。

键盘支持灯光颜色具有:

彩虹色-红色-橙色-黄色-绿色-青色-蓝色-紫色-白色-共九种颜色。

VR键-操作说明:

VR键功能说明: 1. 支持灯光模式切换, 每按压一次切换灯光模式一次-一直循环, 左右转动是调节灯光明暗或变化快慢 (在长亮灯光模式时-能调灯光明暗在呼吸灯光模式时能调快呼吸快慢。) 2. FN+按压VR键切换到多媒体模式。这时按压VR键是播放或静音。左右转动是播放音量大小作用。再FN+按压VR键又切换到灯光模式调节如此循环。

键盘FN组合键功能:

Table with 2 columns: FN+PGUp/PGDn, FN+Win+\*, FN+Alt+\*. Functions include screen brightness, volume, and system shortcuts.

S75键盘在WIN系统时FN多媒体功能键说明:

Table with 3 columns: FN+F1, FN+F4, FN+F7, FN+F10, FN+WIN+WIN键. Functions include screen brightness, volume, calculator, and window management.

S75键盘在MAC系统时FN多媒体功能键说明:

Table with 3 columns: F1=电脑屏幕亮度-, F4=呼出 Siri/ALT+空格键, F7=上一曲, F10=静音, FN+FN+F1, FN+F4+F4, FN+F7+F7, FN+F10+F10. Functions include screen brightness, Siri, media control, and window management.

English

S75-VR screenless the third mock examination keyboard manual

Scope of application:

The Xinmeng S75-VR third mock examination keyboard is designed with 81 keys, featuring VR functionality and ARGB lighting. It supports three working modes: Bluetooth, 2.4G, and wired, allowing for connection and control with related devices.

Hardware requirements:

A phone or computer with Bluetooth and a USB port available for connecting devices.


Schematic diagram of three-mode connection:




Bluetooth connection mode



2.4G connection mode



Wired connection mode



S75 the third mock examination keyboard installation steps and usage:

- 1. S75 Third Mock Examination Keyboard Bluetooth Mode Connection, Pairing, Installation Steps, and Usage: When using the Bluetooth channel of the keyboard, turn the keyboard's mode switch to the BT icon position, then long press the FN+Q keys to broadcast via Bluetooth. At this time, the Q key symbol light on the keyboard will flash rapidly in cyan. If you long press the FN+W Bluetooth broadcast keys, the W key symbol light on the keyboard will flash rapidly in pink. When you long press the FN+E Bluetooth broadcast keys, the E key symbol light on the keyboard will flash rapidly in yellow. When the Bluetooth pairing is successful, the corresponding key symbol light will remain on for a while before returning to the original light mode. If the keyboard is connected to a mobile phone, you need to long press any combination of the keyboard keys FN+Q/FN+W/FN+E to broadcast via Bluetooth. Then, open the phone's 'Settings' and click on Bluetooth; select the device name in the Bluetooth dialog box for pairing and connection. If using on a computer with Windows 7, click [Start] and select 'Control Panel', then click 'Add Device'. The computer will then display the device addition interface. Next, turn the keyboard's mode switch to the Bluetooth icon position, then long press the keyboard keys FN+Q, W, E to broadcast for pairing. When the keyboard icon appears on the computer interface, select the 'Keyboard icon' and click on the 'Next' dialog box in the 'Add Device' prompt. Follow the instructions, and the computer can be connected to the keyboard via Bluetooth. Installation steps on Windows 10: On the computer, click 'Start', select 'Devices', select 'Bluetooth', then select the 'Keyboard icon' from the list and click on 'Pair' to complete the operation according to the interface dialog. Different operating systems may have different procedures, so pay attention during installation and connection.

- 2. Installation steps and usage of the S75 third mock examination keyboard in 2.4G mode: The keyboard can also be connected to a computer with a receiver. Place the keyboard mode switch in the 2.4G icon state, and press and hold the FN+R keys. At this time, the R key indicator light on the keyboard will flash blue light rapidly. At this point, quickly plug the receiver into an empty USB port on the computer. The computer will automatically confirm the pairing and install the corresponding adapter software. When the computer completes the installation and is ready for use, the R key indicator light on the keyboard will turn off after a while and then return to the original light mode. This indicates that the keyboard has successfully paired with the computer and is ready for use.
- 3. S75 the third mock examination keyboard wired mode installation steps and usage: The keyboard can also be connected to a computer using the included TYPE-C data cable. When the USB data cable is plugged in, and the mode switch button of the keyboard is pressed to the middle wired icon position, the keyboard is connected to the computer using a USB wired method. When the keyboard battery is low, the <ESC> key light will illuminate in red - indicating that the keyboard is also in a charging state - until it is fully charged, at which point the key light will return to its original lighting mode.

S75 - Instructions for the FN function and lighting operation of the third mock examination keyboard:

Table with 2 columns: FN+Q, FN+W, FN+R, FN+TAB, FN+DEL, FN+\*, FN+\*, FN+BackSpace. Functions include lighting effects, brightness, volume, and system shortcuts.

The keyboard supports the following lighting effect modes:

- 1. When using the keyboard for the first time, it is recommended to fully charge the keyboard using the data cable provided with the product by connecting it to a computer USB port or a DC-5V charger before use. When charging, observe the direction of the TYPE-C head of the cable and carefully insert it into the keyboard's connection socket. When the charging is properly connected, the keyboard's ESC key indicator light will illuminate in red. When fully charged, the indicator light color will revert to the current mode.

The specific colors of lights supported by the keyboard are: Rainbow color - red - orange - yellow - green - cyan - blue - purple - white - a total of nine colors.

VR button - Operating instructions:

VR button function description: 1. Supports switching between lighting modes. Each press switches the lighting mode once - continuously looping. Rotating left and right adjusts the brightness or changes the speed of the lighting (in the continuous lighting mode - can adjust the brightness; in the breathing lighting mode - can adjust the speed of breathing). 2. FN + pressing the VR button switches to multimedia mode. At this time, pressing the VR button plays or mutes. Rotating left and right adjusts the volume of playback. Then, FN + pressing the VR button switches back to the lighting mode adjustment, and so on.

Keyboard FN key combination function:

Table with 2 columns: FN+PGUp/PGDn, FN+Win+\*, FN+Alt+\*. Functions include screen brightness, volume, and system shortcuts.

Description of FN multimedia function keys on S75 keyboard in WIN system:

Table with 3 columns: FN+F1, FN+F4, FN+F7, FN+F10, FN+WIN+WIN键. Functions include screen brightness, volume, calculator, and window management.

Description of the FN multimedia function keys on the S75 keyboard when used on a MAC system:

Table with 3 columns: F1=Computer screen brightness-, F4=Call Siri (ALT+Spacebar), F7=Previous track, F10=Mute, FN+FN+F1, FN+F4+F4, FN+F7+F7, FN+F10+F10. Functions include screen brightness, Siri, media control, and window management.

Notes:

- 1. When using this keyboard for the first time, it is recommended to fully charge the keyboard using the data cable provided with the product by connecting it to a computer USB port or a DC-5V charger before use. When charging, observe the direction of the TYPE-C head of the cable and carefully insert it into the keyboard's connection socket. When the charging is properly connected, the keyboard's ESC key indicator light will illuminate in red. When fully charged, the indicator light color will revert to the current mode.
- 2. This keyboard features an intelligent power-saving function: when the keyboard remains idle for about 1-5 minutes, it will automatically turn off the backlight. Pressing any key will restore the lighting.
- 3. When the keyboard is plugged into the receiver and the computer cannot recognize it for use, it should be considered that the issue may be caused by poor contact of the port. In this case, it is necessary to replace the USB port with another one on the computer. When the backlight of the keyboard becomes dim or no light is on during use, it should be confirmed that the issue is caused by insufficient built-in battery power. If the battery is insufficient, it is necessary to charge it in time. When charging, the TYPE-C cable provided should be properly connected to the keyboard before charging. Do not insert the TYPE-C head too hard to avoid damaging the TYPE-C socket of the keyboard. The charging time may vary depending on the power of the charger. If the product is not being used for a long time, please turn the product mode switch to the wired icon position.
- 4. When the product experiences stalling, malfunction, or sudden immobility during use, after ruling out the possibility of low battery voltage, it should be considered that there may be interference from co-channel signals in the surrounding environment. In this case, you can connect the product to a computer using a TYPE-C cable to switch to wired mode. Alternatively, you can re-pair and switch the Bluetooth channel or 2.4G channel to resolve the issue. The pairing method is as shown above. If the pairing fails, you can try again. If the above methods do not resolve the issue, please call the relevant product service hotline for assistance.
- 5. This keyboard features a built-in lithium battery design, utilizing a high-capacity lithium battery. For the safety of users, the product should only be used indoors at room temperature. Please avoid using it in extreme cold or near heat sources.
- 6. Disposal of damaged products: If a product is damaged beyond repair, please refrain from dismantling it or throwing it into a fire to avoid potential hazards. Instead, it should be taken to a professional waste disposal station or placed in a dedicated recycling bin for proper disposal.

List of items:

- 1. One TYPE-C charging cable
- 2. One copy of the warranty card and user manual
- 3. 2.4G receiver

新盟产品质量保证卡

承蒙贵商购新盟产品, 谨致谢意! 为了让您放心使用本产品, 更好地保护您的权益, 我公司在严格执行国家质检总局联合信息产品部以及国家工商行政管理总局共同签发的《微型计算机产品质量更按退货责任规定》的基础上实行售后服务, 特作出如下承诺:

一、服务有效期:

自购买之日起生效, 即以本凭证记载的日期为准。

二、服务内容:

- 自购买之日起15日内, 包装未损坏, 不影响再次销售的产品, 消费者不满意, 包退包换。
- 自购买之日起15日内, 消费者不满意, 包换同档价值之新盟产品。
- 自购买之日起, 由电气性能不良引起的产品故障, 在质保期内, 免费进行维修。(维修具体事宜由所在区域之新盟产品年代或新盟产品总公司处理)

三、不属于服务之范围:

- 已经超出有效服务或免费维修期限的。
- 未按正确使用说明使用, 维护, 导致导致故障或损坏的。
- 非新盟产品授权维修机构维修而导致的故障或损坏。
- 三包凭证上无经销商盖章资料及盖章之产品。
- 擅自涂改三包凭证内容的。
- 消费者自行拆除产品底部QC PASS贴纸之产品。
- 由于不可抗力(如地震、火灾、水灾)原因造成产品之不良。
- 人为因素造成之产品不良(如操作失误, 搬运损坏, 磕碰, 输入不合电压等)。
- 其他非产品设计, 技术, 制造, 质量等问题而导致的故障或损坏。

四、联系方式:

新盟产品售后服务承诺, 实行全国联保, 新盟产品各省代理及分公司有义务履行承诺。新盟产品客服热线: 400-006-3588

注:本承诺中电话号若有变更, 恕不另行通知。

注意事项:

- 1. 初次使用本键盘时, 建议先用产品配带的数据线连接电脑USB端口或DC-5V充电器对键盘进行充满电后再使用。充电时要观察连接TYPE-C头的方向小心插进键盘的连接座内, 当插好充电时键盘ESC键灯灯亮红色灯光, 充满电时会恢复当前模式下指示灯颜色。
- 2. 本键盘具有智能省电功能: 当键盘静止不用1-3分钟左右, 键盘会自动关闭背光灯, 这是按任意键可恢复灯光。
- 3. 在使用本键盘当墙上接收器, 电脑无法识别使用时, 应考虑端口接触不良造成, 需要更换插另一个电脑USB端口使用。当键盘使用中背光灯变暗或无灯亮时应先确认是产品内置电量不足造成, 出现电量不足要及时进行充电。充电时要把配送的TYPE-C线同键盘连接好才能充电, 插TYPE-C头不要太用力以免损坏键盘TYPE-C座。充电时间会根据充电器功率大小所用的时间会有所长短。如产品长时间不用, 请把产品模式开关打到有线图标位置。
- 4. 当产品在使用中出现卡顿, 失灵或突然不动, 在排除电池电压低的原因外, 应考虑是所在环境有同频信号干扰造成, 这时可用TYPE-C线连接电脑变有线模式使用。也可把蓝牙频道或2.4G通道重新对码切换解决, 对码方法如上面所示 (一次对不上码可重复操作)。如以上方法不能解决, 请按相关产品服务热线进行解决。
- 5. 本键盘内置锂电设计, 键盘采用大容量锂电设计所以为了使用者安全, 产品只能在室内常温下使用, 请不要在极寒或高温靠近火源地方使用。
- 6. 产品损坏丢弃处理: 如产品损坏不能修复时, 请勿自行拆解或丢入火中, 以免发生意外危险。应送专业废品处理站或专用回收箱进行处理。

物品清单:

- 1. TYPE-C充电连接线一条
- 2. 说明书保修卡一份
- 3. 2.4G接收器

新盟产品

本凭证为新盟产品售后服务的重要依据, 请您妥善保管!

Table with 2 columns: 销售记录, 维修记录. Includes fields for user name, address, phone, product name, and date.

Table with 5 columns: 维修次数, 维修单位, 地址, 电话, 邮编. Includes fields for repair count, unit, address, phone, and zip code.

Table with 5 columns: 品牌名称, 规格 (Spec), 重量 (Weight), 功率 (Power), 使用寿命 (Life), 售后服务 (After-sales). Includes fields for brand, spec, weight, power, life, and after-sales.

QC PASS 合格证 东莞市新盟达电子有限公司

新盟产品售后服务承诺, 实行全国联保, 新盟产品各省代理及分公司有义务履行承诺。新盟产品客服热线: 400-006-3588